



Design: Bruno Fattorini



Description

A simple and pure shelf capable of conversing with different shapes and of aggregating fairly with different products. A "universal" line, useful for every need.

Top made from MD wood fiberboards, coated with:

Matt white acrylic resin • Natural oak wood • Carbone • Fine wood, Italian walnut • Reconstructed stone • Reconstructed marble, finishes: black ebony and white Carrara • Diamond (glossy red) • Brass sheet.

The white acrylic resin finish matches with the Tense collection while the wood, brass, red diamond, reconstructed stone and reconstructed marble finishes match with the Tense Material collection.

Structure with bearing bracket made from steel powder-coated in aluminum grey. Adjustable inclination with special soft perimeter profile (about 3/8"), that enables an easy and perfect installation (to make up for the various irregularities of wall structures).

Also available in electrified version, with cable management door and back interspace to make cables pass and be hidden. Door available in matt white for the acrylic resin, reconstructed stone white Calce and reconstructed marble Carrara white version; in matt black for the other versions.

Made in Italy.

Finishes & Materials

Wood top coated with: Acrylic resin / Natural oak wood / Carbone / Fine wood, Italian walnut / Reconstructed stone / Reconstructed marble (Black ebony / White Carrara) / Diamond / Brass sheet.


* For more specifications, please refer to the "Finishes & Materials" PDF




Link -


Dimensions

- A) 70"7/8W x 19"D
- **B)** 82"5/8W x 19"D
- **C)** 94"1/2W x 19"D
- **D)** 106"1/4W x 19"D
- **E)** 118"1/8W x 19"D

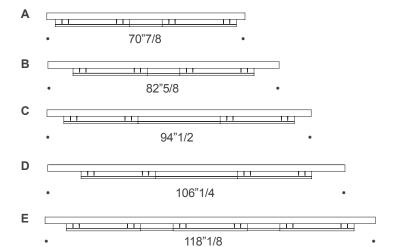

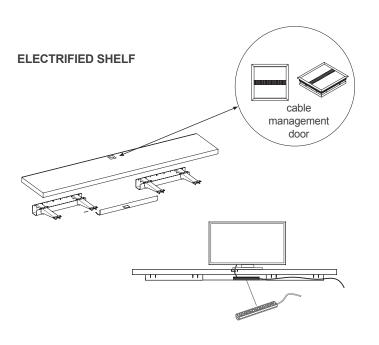


Electrified version



Standard version





Shelf depth 19" + 3/8" gasket (by pushing the Link shelf against the wall the gasket is reduced up to 5/64")

CABLE MANAGEMENT DOOR POSITION

Shelf width	х	Υ	z
70"7/8	2"1/4	18"1/4	90
82"5/8	2"1/4	18"1/4	105
94"1/2	2"1/4	18"1/4	120
106"1/4	2"1/4	18"1/4	135
118"1/8	2"1/4	46.5	150

