

DRYLIGHT® IP65 Outdoor Chandelier - S24



Description

Luxury Italian outdoor lighting, inspired by Venetian Tradition. DRYLIGHT® technology with IP65 protection level: Complete safety in any weather conditions.

DRYLIGHT® resolves three problems:

- Protection against water and dust, corrosion resistant;
- Resistance to stress, wind and other impacts;
- Lightness, modularity and easy installation.

Thanks to this technology, it is now possible to fit any outdoor environment with Venetian style chandeliers, with the same safety as a regular outdoor light.

High-end outdoor chandelier with 24 arms. Pendants in methacrylate (DRYLIGHT EXTREME).

Optional hanging rods for extra length, remote control kit or floor support.

Two lighting versions are available:

- DRYLIGHT LED W:
24 x LED 72W tot, 3840 lm
- DRYLIGHT LED RGBW:
24 x LED 96W tot, 3840 lm

DRYLIGHT® IP65 Outdoor Chandelier

EXTREME VERSION:
polycarbonate
pendants and prisms



LINE DRYLIGHT IP65
TOTAL PROTECTION AGAINST
WATER



**WHITE LED LIGHTING
OR RGBW LED LIGHTING**
POSSIBILITY TO RECREATE
COUNTLESS SCENARIO THANKS
TO RGBW TECHNOLOGY



**COMPATIBLE WITH
DMX PROTOCOLS**
SUITABLE FOR THE
MOST ADVANCED HOME
AUTOMATION SYSTEMS



**EASY INSTALLATION
AND LOW MAINTENANCE**
LIGHTWEIGHT AND READY-FOR-
USE ARTICLES, NO ASSEMBLY
REQUIRED

Dimensions

Ø41"3/4 x 74"3/4H Includes rod 17"3/4
Canopy: Ø7"7/8 x 5"1/2H

Finishes and materials

Pendants: Methacrylate.


Device Control for DRYLIGHT LED W:

Only Through existing cable connections.
Dimmable Push or Dimmable 1-10.

Device Control for DRYLIGHT LED RGBW:

- DMX protocol control kit;
- Smart Light App (Only for RGBW version. Android and iOS);
- Remote control kit (Only for RGBW version).

Note: When installed, any other control system is disabled.

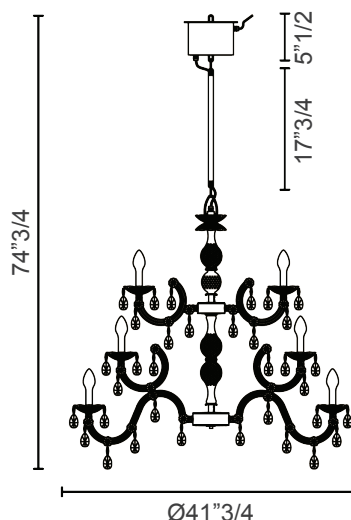

DRYLIGHT® IP65 Outdoor Chandelier

Optionals

Remote Control Kit:


- Driver board;
- Remote control.

Available only for DRYLIGHT LED RGBW version.



LIGHT SPECIFICATIONS


Single diode LED RED	50 lm
Single diode LED GREEN	90 lm
Single diode LED BLUE	30 lm
Single diode LED WHITE	100 lm
Composite white light	160 lm

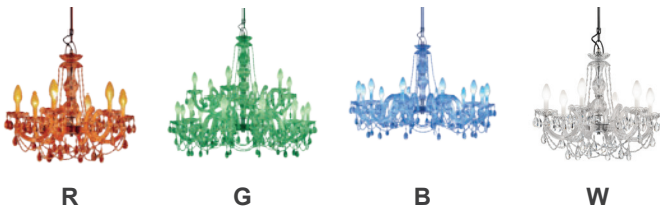

Hanging Rod:

1 x 17"3/4 rod is already assembled in the standard suspension.
Maximum extension: 35"3/8 in addition to the standard.


Dimensions: A) 17"3/4
B) 13"3/4
C) 9"7/8

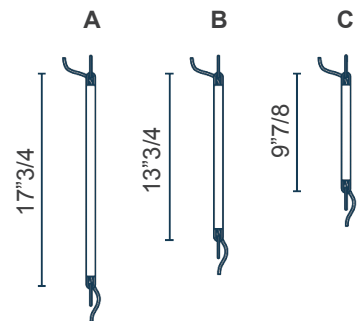

DRYLIGHT Floor Support:

Zin-coated and painted metal structure with adjustable height.
Base geared for fixing to the ground.
Base 51"1/8W x 51"1/8D with cross brackets for square concrete slabs.
It is suggested to fix 4 square slabs 23"5/8W x 23"5/8D, of 73 pounds each.

Positions:

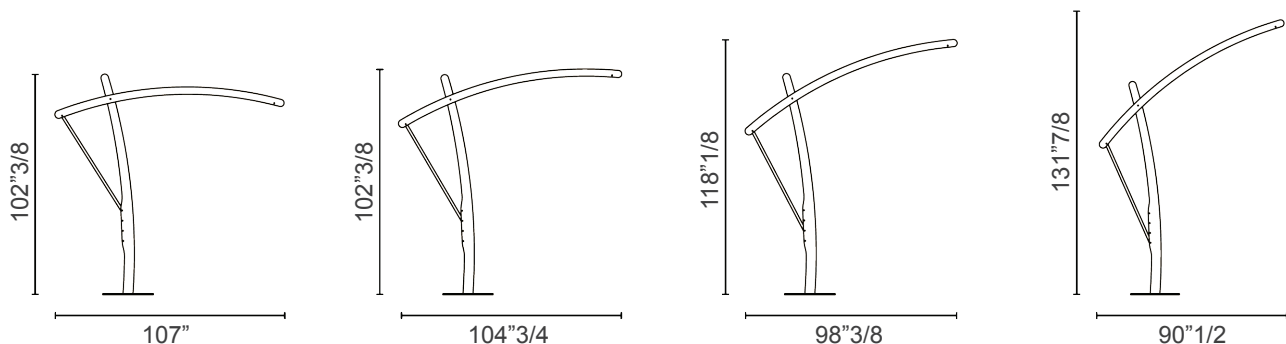

(For more specifications, please refer to "Finishes & Materials")