

16



Description

Tree armature system connects glass pieces to a series of branches.

16 is formed by sequentially pouring three separate layers of molten glass – in varying opacities – on a horizontal plane. Each layer responds to the indeterminate shape of the previous pour to create a uniquely layered whole.

LED lamps and power supplies are included. Install power supplies remotely in a close, accessible, water tight and hidden location for ease of long term maintenance. Installation to be done by certified personnel to ensure code compliance.

All trees are rated (IP 56) for outdoor (or indoor) use based on structural analysis for the maximum loaded trees noted above in moderately sheltered locations near seawater with minimal snow-loads. Any other application restraints may need further engineering.


Colour pendants: grey 1, grey 2, white 1 or white 2.

16


Dimensions

- 16.5) 30"1/2W x 39"3/8H
- 16.6) 33"5/8W x 51"5/8H
- 16.7) 33"1/2W x 53"H
- 16.8) 32"1/4W x 43"3/8H
- 16.9) 34"7/8W x 50"H
- 16.10) 39"3/4W x 51"1/8D x 110"1/4H
- 16.15) 85"5/8W x 64"5/8D x 139"3/8H
- 16.20) 106"1/2W x 84"D x 140"1/8H
- 16.25) 95"1/4W x 41"3/4D x 184"5/8H
- 16.35) 104"3/8W x 48"D x 280"3/8H
- 16.40) 115"3/8W x 80"1/8D x 279"1/2H

Pendant

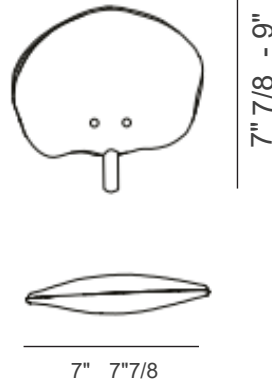


16.5) 2 branches,
5 pendants and Ø8"
stainless steel base



30"1/2

39"3/8



16.6) 2 branches,
6 pendants and Ø8"
stainless steel base



33"5/8

51"5/8



16.7) 2 branches,
6 pendants and Ø8"
stainless steel base

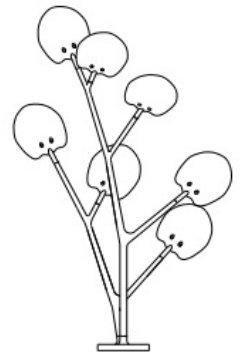

33"1/2

53"



16.8) 2 branches,
8 pendants and Ø8"
stainless steel base



43"3/8

32"1/4

16.9) 2 branches,
9 pendants and Ø8"
stainless steel base




50"

34"7/8

16.10) 3 branches,
10 pendants and Ø5"7/8
stainless steel base




51"1/8

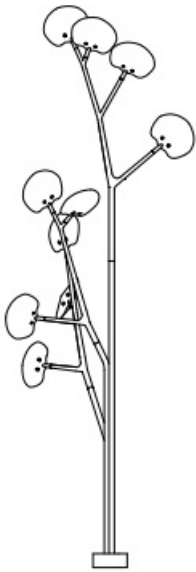


110"1/4

39"3/4

16.15) 3 branches,
15 pendants and Ø5"7/8
stainless steel base



64"5/8

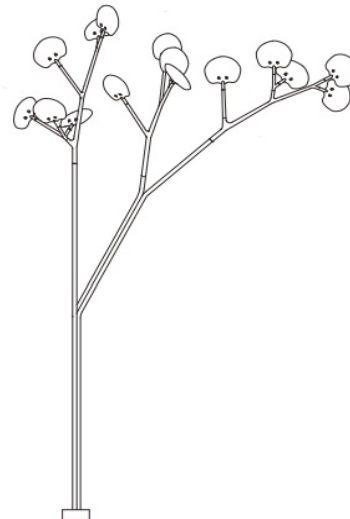


139"3/8

85"5/8


16.20) 7 branches,
20 pendants and Ø9"7/8
stainless steel base




16.25) 7 branches,
25 pendants and Ø9"7/8
stainless steel base

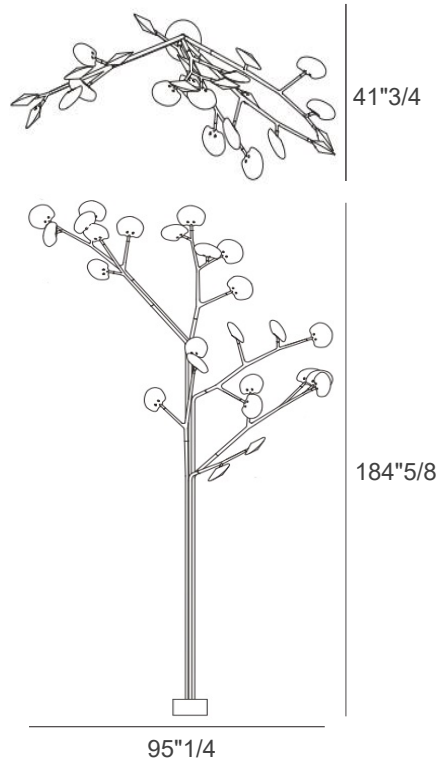

16.35) 7 branches,
35 pendants and Ø9"7/8
stainless steel base

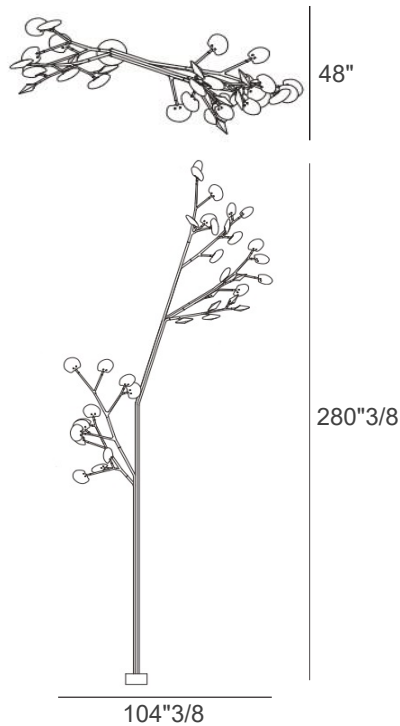

16.40) 7 branches,
40 pendants and Ø9"7/8
stainless steel base

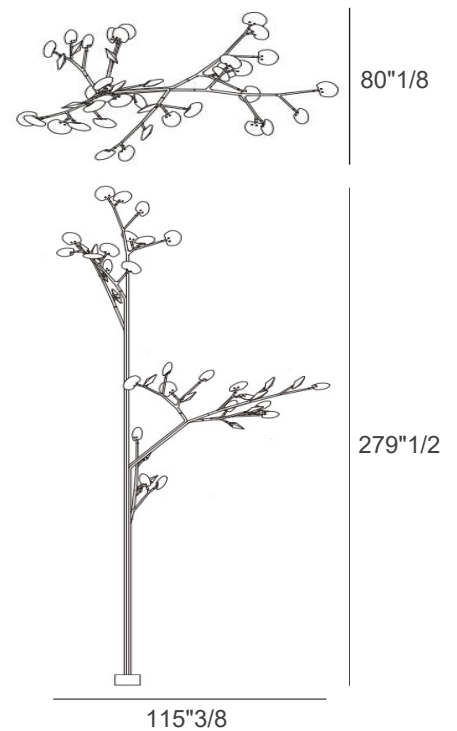

Specifications

Mounting: Floor mounted

Glass Color: Grey 1, grey 2, white 1, white 2.

Lamp: 1W LED, 2700K, 100lm.

16.5 - 7.5W

16.6 - 9W

16.7 - 10.5W

16.8 - 12W

16.9 - 13.5W

Finish: Bead blasted.

Materials: Poured glass, steel armature, electrical components, stainless steel base.

Power Supply: Remote mounted in an easily accessible and hidden location for ease of long-term maintenance. Not dimmable.

Environment: Outdoor, wet location. IP56.

Installation requires anchoring into either an existing structural slab or a newly built foundation to meet the specifications of the design drawings, including appropriate drainage if exposed to water and remotely mounted LED drivers.



CB CE UK CA

