


& 'F UbXca

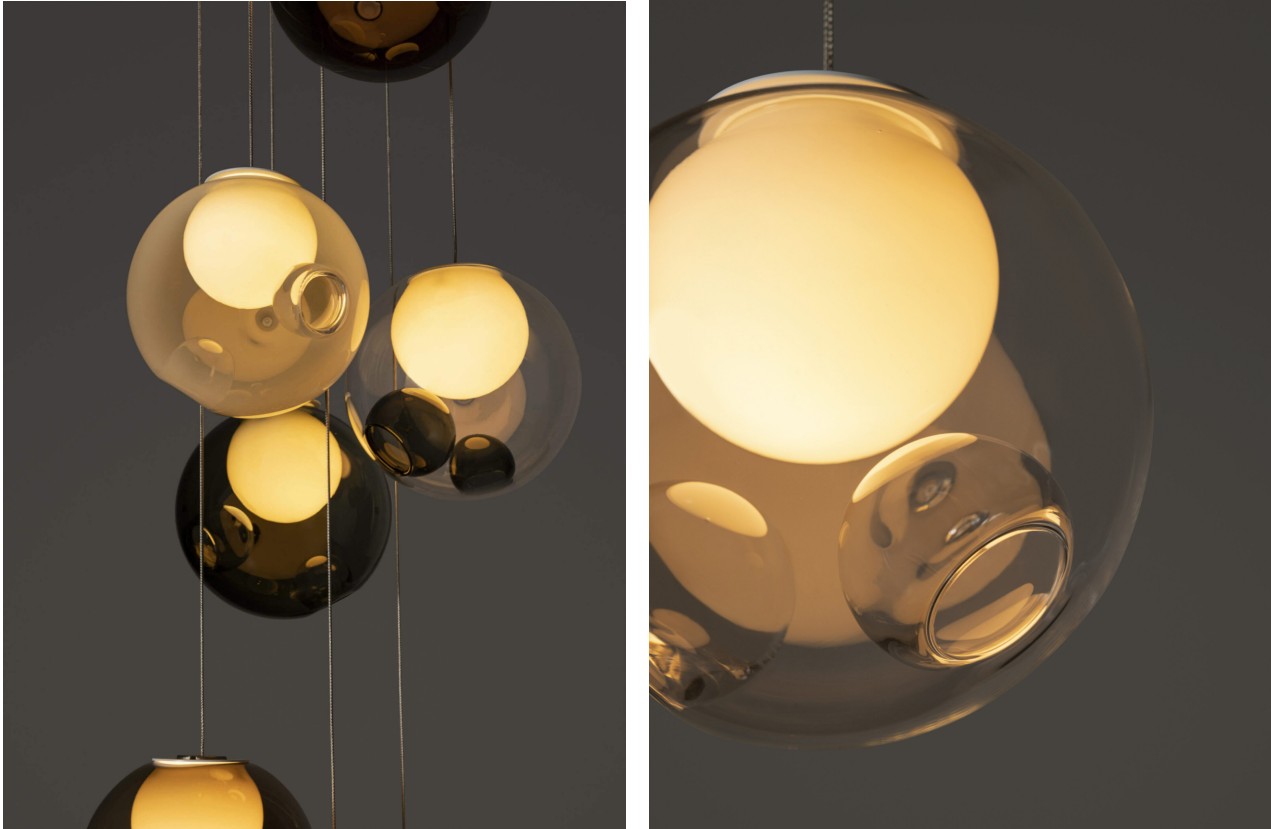

Description

28 is an exploration of specificity in manufacturing. Instead of designing form itself, here the intent was to design a system of making that yields form.

Individual 28 pendants result from a complex glass blowing technique where by air pressure is intermittently introduced into and then removed from a glass matrix which is intermittently heated and then rapidly cooled. The result is a distorted spherical shape with a composed collection of imploded inner shapes, one of which acts as a shade for the light source.

Standard 28s are made with clear glass exterior spheres and milk white interior lamp holder cavities. 28s are possible with infinite versatility in color compositions, sizes and shapes.

Each pendant comes standard with 118"1/8 of coaxial cable. Up-charge applies for lengths over 118"1/8.

Cable length can be adjusted on site. White, black or brushed nickel canopy.

Remote mounted power supplies recommended for ease of long term maintenance.

Installation to be done by certified personnel to ensure code compliance.

Lamps and power supplies are included.

28 Random

Dimensions

28.3) $\pm \text{Ø}6'' \times 118''1/8\text{H}$

28.5) $\pm \text{Ø}8'' \times 118''1/8\text{H}$


28.7) $\pm \text{Ø}8'' \times 118''1/8\text{H}$

Pendant size: $\text{Ø}6''1/2$ approx.

Pendant




$\pm \text{Ø}6''1/2$



28.3

RANDOM

three pendants fixture,
 $\text{Ø}6''$ round canopy



28.5

RANDOM

five pendants fixture,
 $\text{Ø}8''$ round canopy



28.7

RANDOM

seven pendants fixture,
 $\text{Ø}8''$ round canopy

Standard Coaxial Cable Length:

- $118''1/8$

Extra Coaxial Cable Lengths (Standard Length + $118''1/8$ Increments):

- $236''1/4$
- $354''3/8$
- $472''3/8$
- $590''1/2$
- $708''5/8$
- $826''3/4$
- $944''7/8$
- $1063''$

Specifications

Mounting: Ceiling mounted.

Glass Color: Clear, colour pendants.

Lamp: 1W LED, 2700K, 100lm.

Coaxial Length: $118''1/8$ standard, up to $1063''$ max.
Adjustable length.

Canopy Finish: White, black or brushed nickel.

Materials: Blown glass, braided metal coaxial cable, electrical components, steel canopy.

Power Supply: Integral.

Bocci recommends remote mounting power supplies for ease of long-term maintenance.


Environment: Indoor, dry location. IP30.




28 Random

3 Pendants Compositions


3r-18

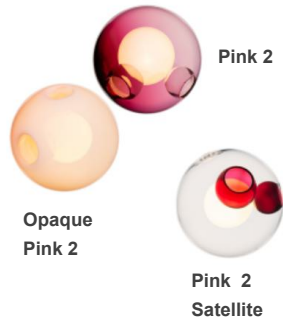

3r-19

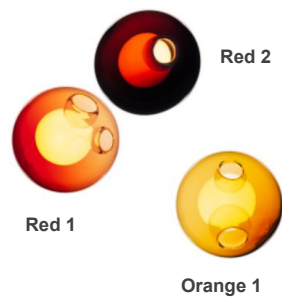


3r-20

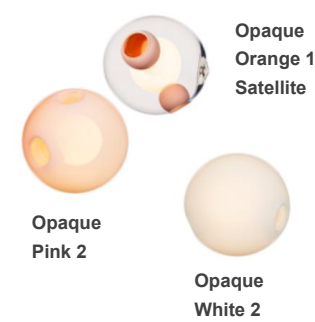


3r-23



3r-21

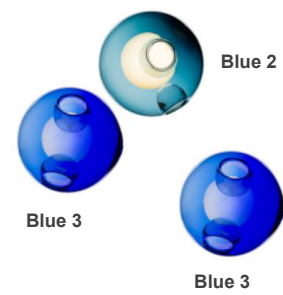

3r-25

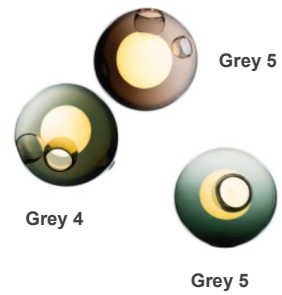

3r-24



3r-01




3r-02



3r-17



3r-04



3r-05




3r-07




3r-08



3r-09

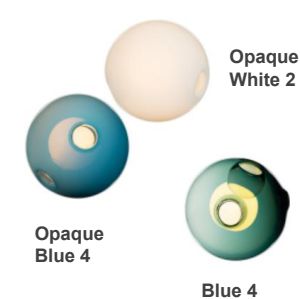

3r-11




28 Random

3 Pendants Compositions


3r-12




3r-14



3r-16



3r-27




3r-22




5 Pendants Compositions

5r-30

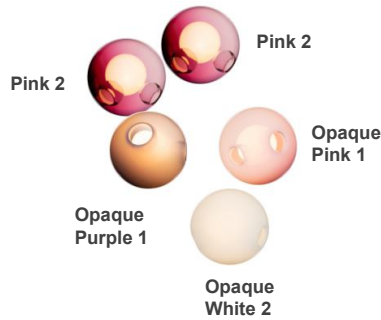

5r-01

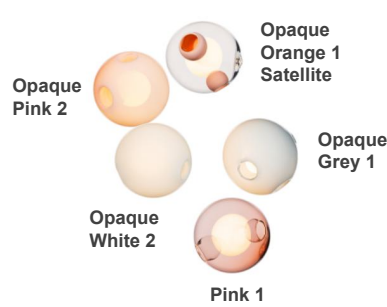

5r-14



5r-03



5r-05




5r-24



5r-31



5r-07

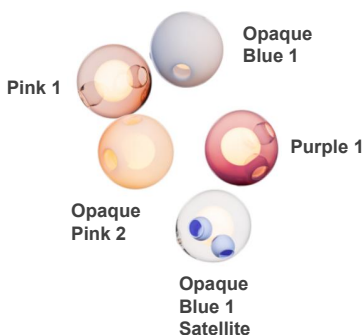


5r-08



5r-09



5r-10

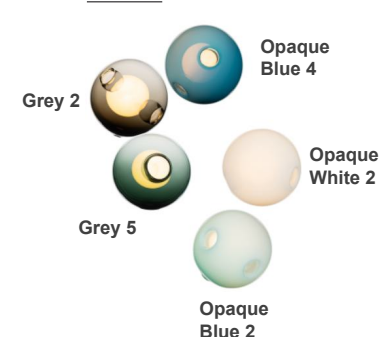


28 Random

5 Pendants Compositions




7 Pendants Compositions

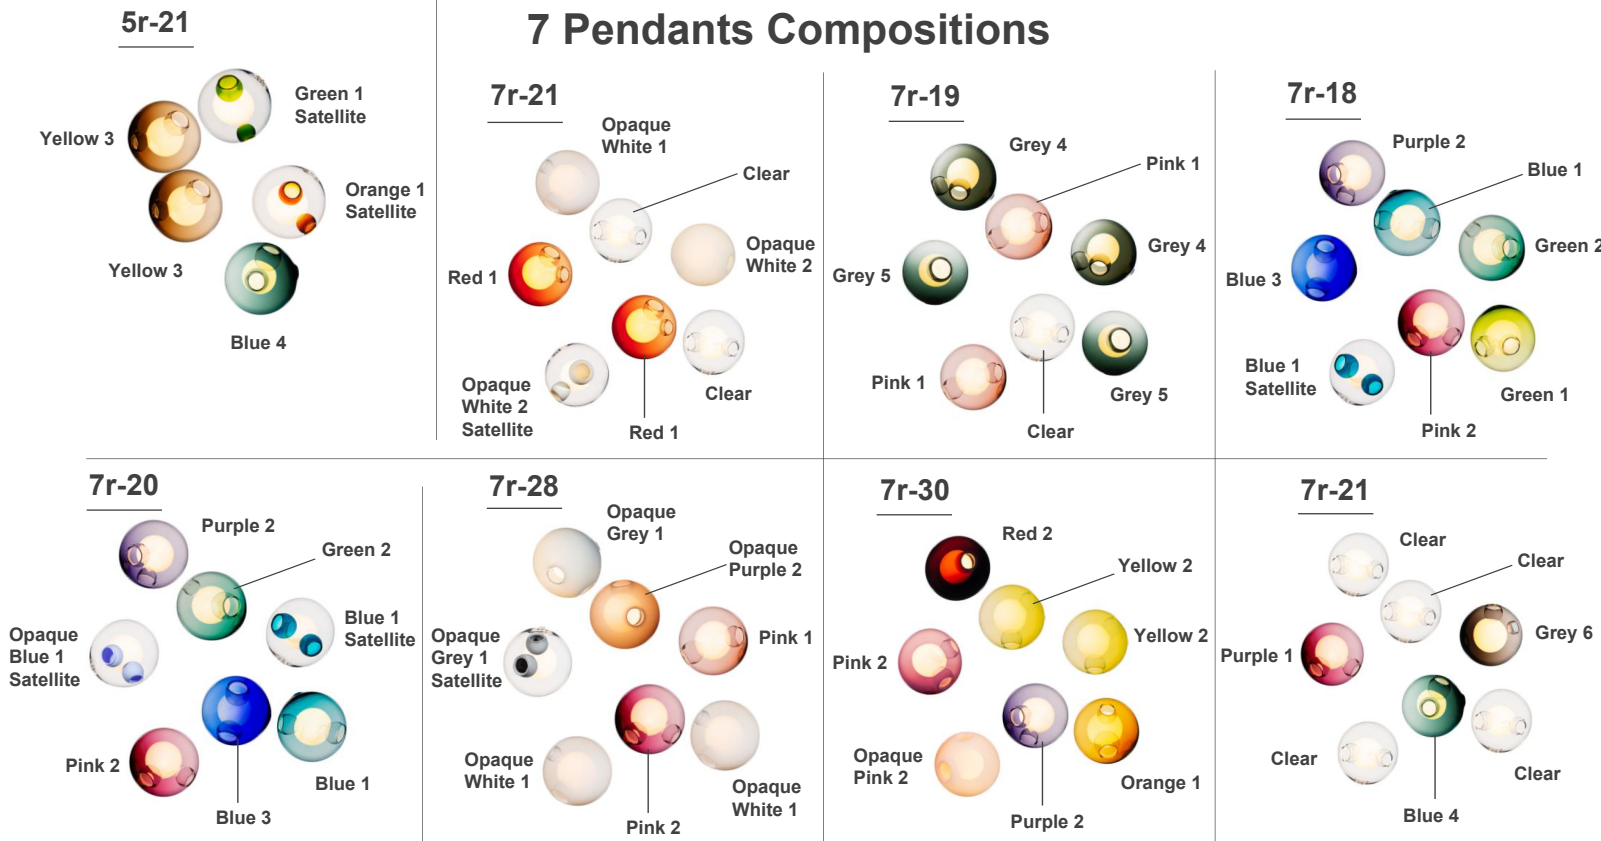


28 Random

7 Pendants Compositions


7r-10

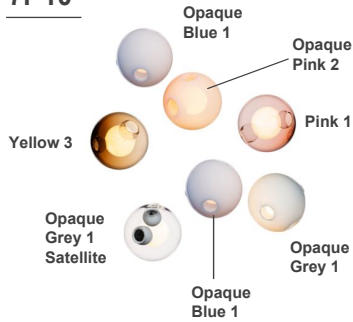


7r-07




7r-08

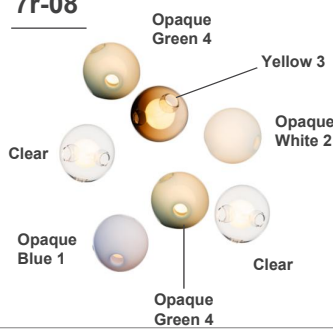


7r-11

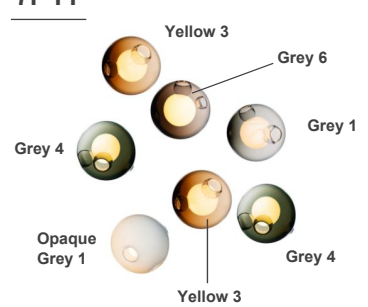


7r-12

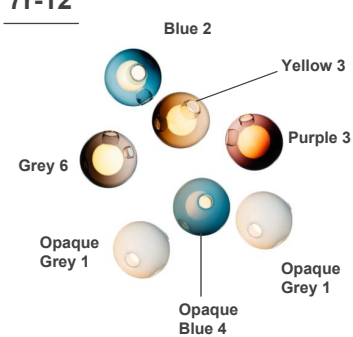


7r-13

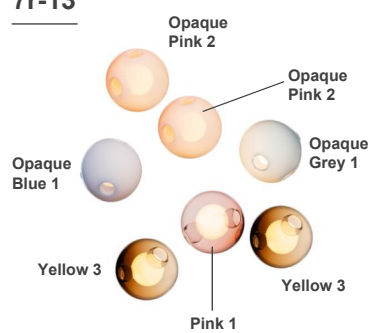


7r-23

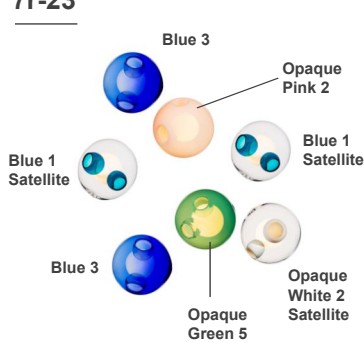


7r-24

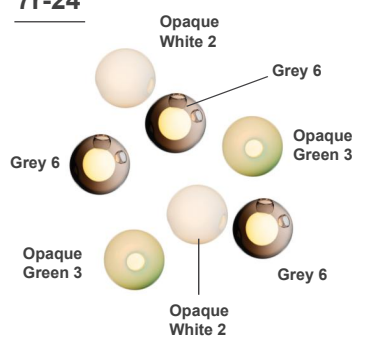

7r-03

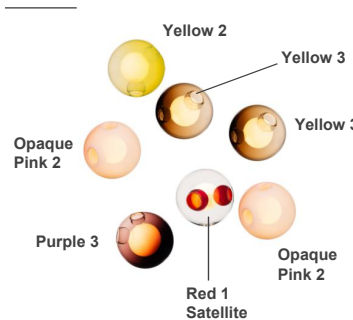

7r-04

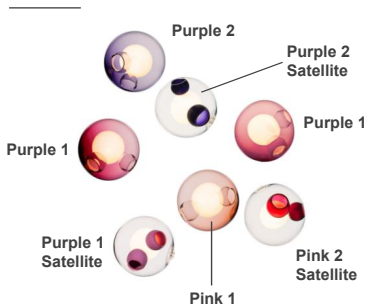

7r-05

