


14 Collection

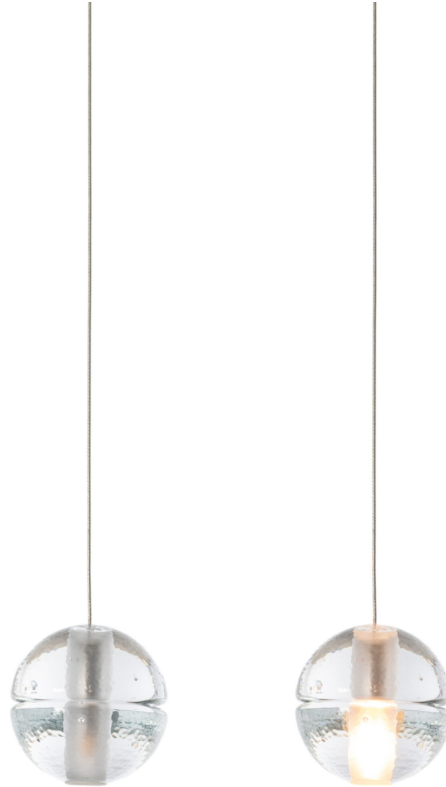

Description

14 is an articulated, cast glass sphere with a frosted cylindrical void that houses a LED lamp. Individual pendants are visually subtle, but gain an atmospheric quality when multiplied and clustered in groups.

Lamps and power supplies are included. Three single pendant models available:

- . 14.1 Random Single clear pendant, Ø4"5/8 x 1/4"H round canopy.
- . 14.1 deep Random Single clear pendant, Ø4"5/8 x 1"5/8H round canopy.
- . 14.1m* Random Single clear pendant, Ø1"1/8 round canopy.

14 series uses a coaxial cable suspension system in a random configuration.

Each pendant comes standard with 118"1/8 of coaxial cable. Up-charge applies for lengths over 118"1/8.

Cable length can be adjusted on site.



White, black or brushed nickel canopy.

14.1m requires a new build/suspended ceiling with remote mounted power supplies.

Remote mounted power supplies recommended for ease of long term maintenance.


Installation to be done by certified personnel to ensure code compliance.

Pendant size: $\pm \text{Ø}4"$

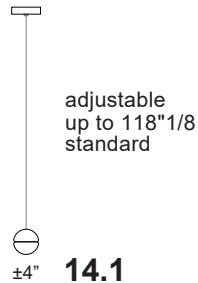


14.1
single pendant
shallow canopy),
 $\text{Ø}4"5/8$ brushed
nickel round canopy

$\text{Ø}4"5/8 \times 118"1/8 \text{ Max.H}$

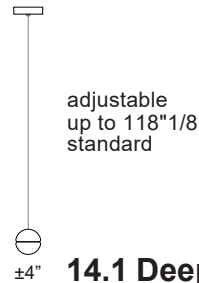

14.1 Deep
single pendant
deep canopy),
 $\text{Ø}4"5/8$ brushed
nickel round canopy

$\text{Ø}4"5/8 \times 118"1/8 \text{ Max.H}$

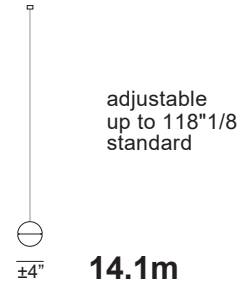

14.1m
single pendant
(mini canopy),
 $\text{Ø}1"1/8$ brushed
nickel round canopy

$\text{Ø}4" \times 118"1/8 \text{ Max.H}$

Standard Coaxial Cable Length:

- 118"1/8

Extra Coaxial Cable Lengths

(Standard Length + 118"1/8 Increments):

- 236"1/4
- 354"3/8
- 472"3/8
- 590"1/2
- 708"5/8
- 826"3/4
- 944"7/8
- 1063"

Specifications

Mounting: Ceiling mounted.

Glass Color: Clear, grey or amber.

Lamp: 1W LED, 2700K, 100lm

Dimmer: CASAMBI.

Coaxial Length: 118"1/8 standard / up to 1063" max. Adjustable length.

Canopy Finish: White, black or brushed nickel.

Materials: Cast glass, blown borosilicate glass, braided metal coaxial cable, electrical components, steel canopy.

Power Supply: Integral. 14.1m remote mounted.

Bocci recommends remote mounting power supplies for ease of long-term maintenance.

Environment: Indoor, dry location. IP30.

