

Copper 28



Description

The 28 copper suspension lamps provide a different compositional reading that results from shaping the copper tubing during installation. Pendants can be angled in any direction to provide a range of sculptural forms. The copper will weather and tarnish, registering the passage of time in its patina. Standard 28s are made with clear glass exterior spheres and milk white interior lamp holder cavities. 28s are possible with infinite versatility in color compositions, sizes and shapes. A flexible copper suspension option (in natural copper) available for all 28 pendants, providing a different compositional reading and a range of sculptural forms.

28.1mc requires a new build/suspended ceiling with remote mounted power supplies. Remote mounted power supplies recommended for ease of long term maintenance. Installation to be done by certified personnel to ensure code compliance.

Longest and shortest lengths are determined by client, Bocci fabricates all lengths between these measurements. Specified shortest and longest lengths are from the underside of the canopy to the underside of the pendant. There may be variance of $\pm 1/8$ " on specified shortest and longest lengths. Up-charge applies for cable lengths over 118"1/8.

White powder coated canopy, lamps and power supplies are included.
Pendant anchor kit not included.

Cluster 28

Dimensions


28.1c) Ø4"5/8 x 1/4"H round canopy

28.1c deep) Ø4"5/8 x 1"5/8H round canopy


28.1mc) Ø2"3/8 round mini canopy

Pendant size: ± Ø6"1/2


Length Measuring Guide

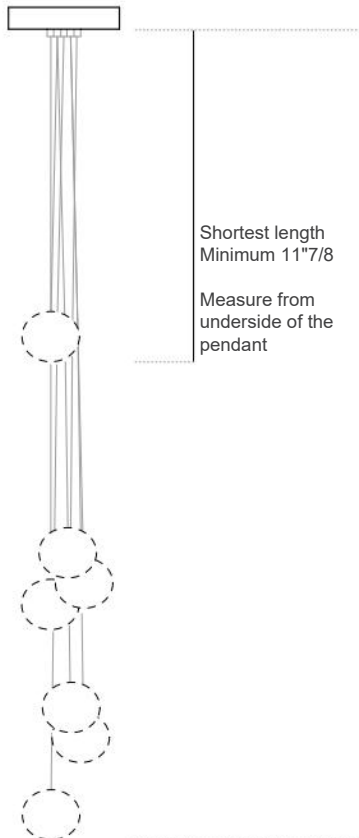

Pendant



± Ø6"1/2

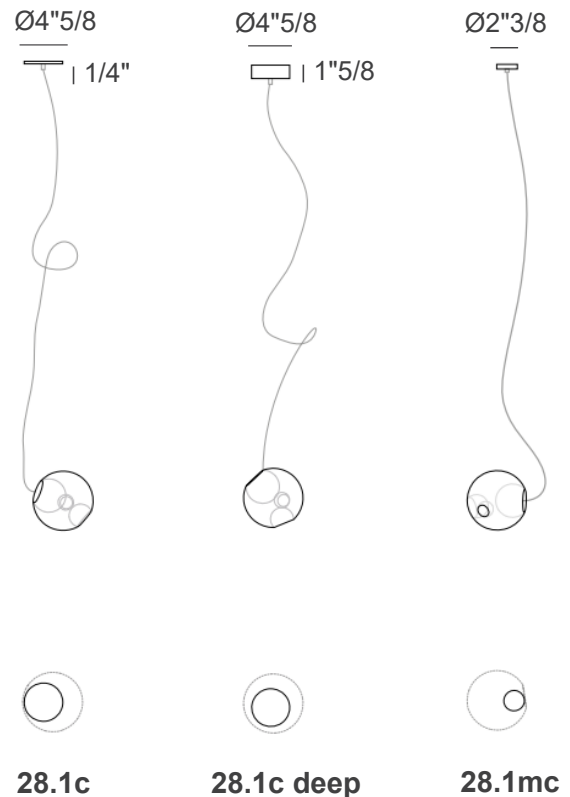

Specifications

Mounting: Ceiling mounted.

Glass Color: Clear, colour pendants.

Lamp: 1W LED, 2700K, 100lm.

Coaxial Length: Fixed lengths. 11"7/8 minimum / up to 472"3/8 max.

Canopy Finish: White, black or brushed nickel.

Materials: Blown glass, braided metal coaxial cable, electrical components, steel canopy.

Power Supply: Integral.

Bocci recommends remote mounting power supplies for ease of long-term maintenance.

Environment: Indoor, dry location. IP30.

