

76



Description

76 results from introducing a vacuum into a strata composed of hot white and clear glass with copper mesh between; the vacuum causes the white layer to pull away through the embedded mesh, leaving numerous tendrils of white glass suspended within an interstitial space as it goes.

The wall and ceiling is designed to be composed in atmospheric groupings.

Lamps and power supplies are included.

76s requires remote mounted power supplies. Remote mounted power supplies recommended for ease of long term maintenance. Installation to be done by certified personnel to ensure code compliance.

Lamp: 0.4W LED, 2700K, 70lm

Materials: Blown glass, electrical components, steel canopy

Power Supply: 76s is remote mounted. 76sp is integral.

Bocci recommends remote mounting power supplies for ease of long-term maintenance.


Environment: Indoor, dry location. IP30

Dimensions


76s) Ø2"3/4

76sp) Ø4"1/2

Pendant size: ± Ø5"7/8

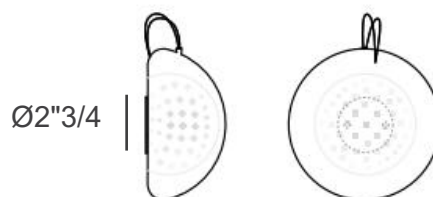

76s) White mini plate

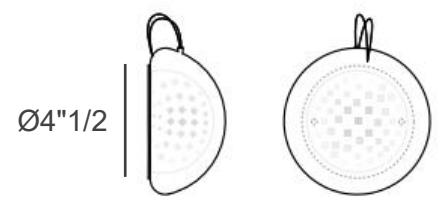

76sp) White large plate