

87



Description

Soda water is used to trap air in a super heated glass matrix, which is vertically stretched and folded back onto itself between pegs numerous times. As the glass cools, the folding motion along the grain of the loop turns the entrapped air into micro-filaments that give the piece a pearlescent optical quality. A low-voltage LED light source is introduced at one end of the loop casting light through the micro-filaments and registering a gentle gradient.

This fixture requires design drawings to determine the specific cable lengths. Please review the length measuring guide and send it to our Sales Department. We will provide drawings for approval, which are required before Bocci can begin production. Please contact us for any inquiries. Pendant anchor kit, lamps and power supplies are included.

Lamp: 1W LED, 2700K, 100lm.

Materials: Blown glass, copper mesh, braided metal coaxial cable, electrical components, steel canopy.

Power Supply: Integral.

Environment: Indoor, dry location. IP30

87

Dimensions

87.11)

Rectangular: 33"1/2W x 11"1/8D

Square: 20"W x 20"D

87.14)

Rectangular: 33"1/2W x 11"1/8D

Round: Ø20"

87.20)

Rectangular: 52"W x 11"7/8D

87.26)


Rectangular: 39"3/8W x 13"1/8D

Round: Ø23"5/8


Square: 23"5/8W x 23"5/8D

Pendant size: 5"3/8W x 18"1/2H


Pendant

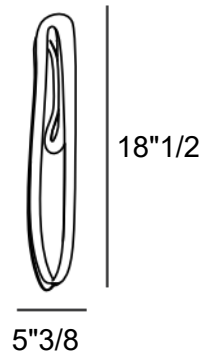


87.11) eleven pendants

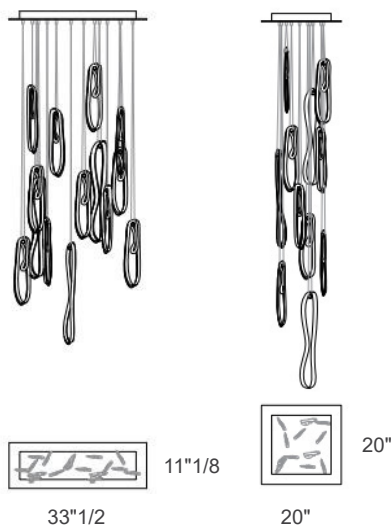

87.14) fourteen pendants

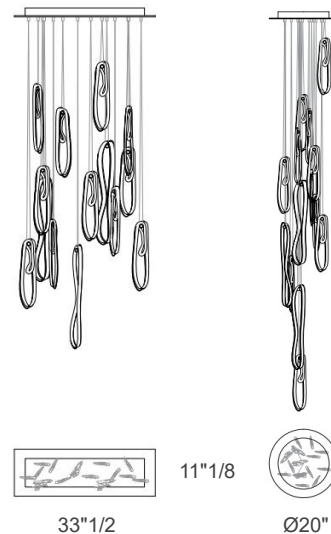


87.20) twenty pendants

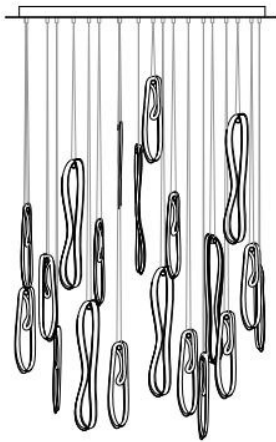

52"

11"7/8

87.26) twenty-six pendants

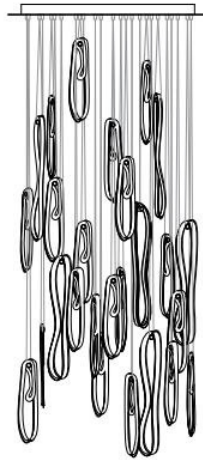


39"3/8

13"1/8



Ø23"5/8



23"5/8

23"5/8

Length Measuring Guide

Please provide the following information:

1. Provide overall height of the room.
2. Determine maximum drop. Measure from the underside of the canopy (NOT away from floor).
3. Determine L x W install dimensions.
4. Provide a sketch of the ideal distribution of pendants relative to the canopy.

