

28 Stem



Description

Floor to ceiling lamp with structure in a black or brass finish and dial control. It is composed of 3 or 6 hand-blown glass pendants mounted on a long stem. The spring-loaded spike system allows for vertical floor-to-ceiling or angled floor-to-wall installation. The semi-rigid black fabric cord includes our patented integral 360 degree dimming system, housed within a sleek brass cylinder.

Made with clear glass exterior spheres and milk white interior lamp holder cavities.

Pendants comes in clear or colored glass.

The lamp is created as a result from a complex glass blowing technique whereby air pressure is intermittently introduced into and then removed from a glass matrix which is intermittently heated and then rapidly cooled. The result is a distorted spherical shape with a composed collection of imploded inner shapes, one of which acts as a shade for the light source.

LED lamps and power cord are included.

The brass used in our Stem Series is untreated and, as such, will develop a natural patina over time. To avoid any marking or tarnish on the brass during handling and installation, please use the gloves provided in your shipment.

28 Stem

Dimensions


- 28.3scm a) 94"1/2H with 3 pendants.
- 28.3scm b) 106"1/4H with 3 pendants.
- 28.3scm c) 118"1/8H with 3 pendants.
- 28.6scm a) 94"1/2H with 6 pendants.
- 28.6scm b) 106"1/4H with 6 pendants.
- 28.6scm c) 118"1/8H with 6 pendants.

Plug type: Type A, 110V

Additional extender:

- 6"
- 12"


Pendant: 6"1/2 aprox.

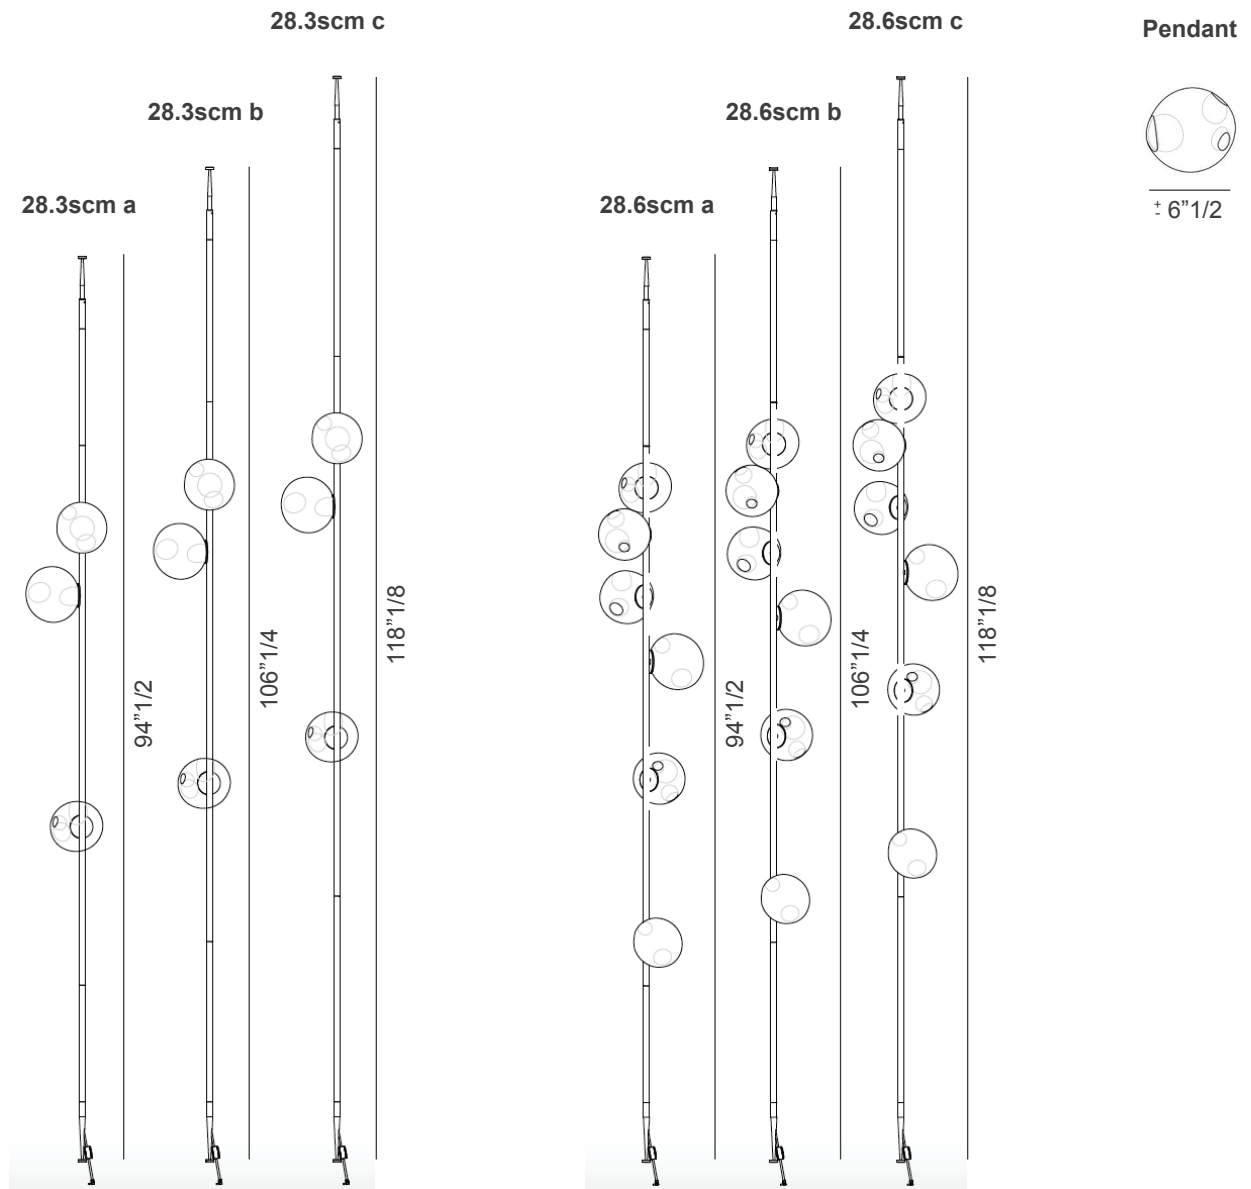

28 Stem

28.3scm Compositions

Stem Column-3A

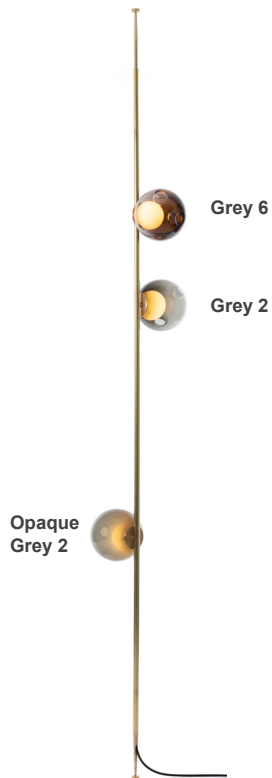


Stem Column-3B




28.6scm Compositions

Stem Column-6A

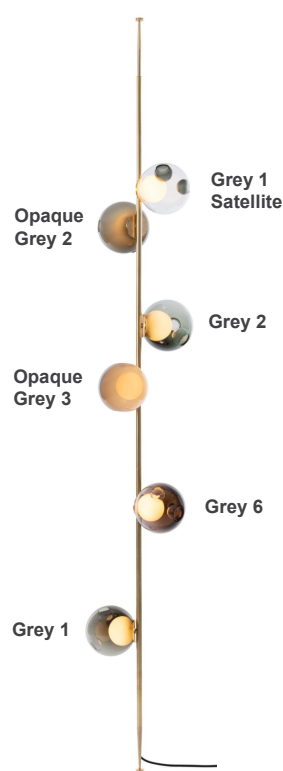

Stem Column-6B

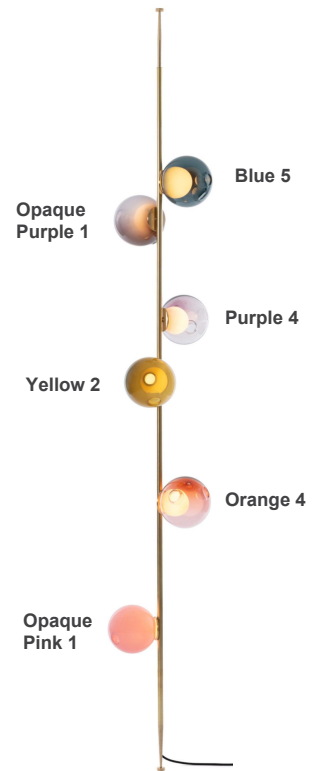

Specifications

Glass Color: Clear, colour pendants.

Lamp: 1W LED, 2700K, 100lm.

Plug Type: Type A - 110V.

Extenders: Additional extender available in 6" and in 12".

Cable Length: 90"1/8 black flexible cord.

Materials: Blown glass, braided metal coaxial cable, electrical components, steel canopy.

Finishes: Brass or black powder coated stem.

Power Supply: Integral, dial control with build-in dimmer.

Environment: Indoor, dry location. IP20.

