

16



Dimensions

Ceiling lamp with a steel armature system in a soft-touch matt black finish allows pre-composed branches to be easily connected to a series of hubs during installation.

This lamp is formed by sequentially pouring three separate layers of molten glass – in varying opacities – on a horizontal plane. Each layer responds to the indeterminate shape of the previous pour to create a uniquely layered whole.

Standard armature comes with 19"5/8 extender.

Remote mounted power supplies recommended for ease of long term maintenance.

Installation to be done by certified personnel to ensure code compliance.

The fixture can be leveled with white pendant anchor kit (included).

16 Armature


Dimensions

16.5a.1) 54"1/8W x 18"5/8D x 33"1/4H
16.8a.1) 61"7/8W x 37"1/8D x 30"5/8H
16.8a.2) 95"5/8W x 35"3/8D x 33"H
16.9a.1) 80"1/8W x 67"D x 40"H
16.9a.2) 62"W x 40"3/8D x 36"7/8H
16.11a.1) 90"1/2W x 69"3/8D x 40"H
16.11a.2) 65"5/8W x 41"D x 35"7/8H
16.13a.1) 68"7/8W x 47"1/4D x 35"7/8H
16.17a.1) 74"3/8W x 78"D x 41"3/8H
16.21a.1) 91"5/8W x 82"D x 44"3/8H
16.26a.1) 84"1/2W x 77"1/2D x 41"3/4H

Standard Extender Lengths:
 19"5/8


Additional Extender Lengths:
 5"7/8
 9"7/8
 19"5/8
 47"1/4

Pendant




Pendant size: 7" - 7"7/8W x 7"7/8 - 9"H


16.5a (5 pendants)

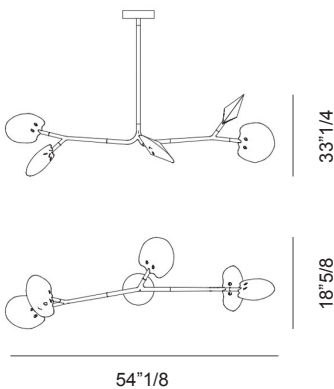


16.8a1 (8 pendants)

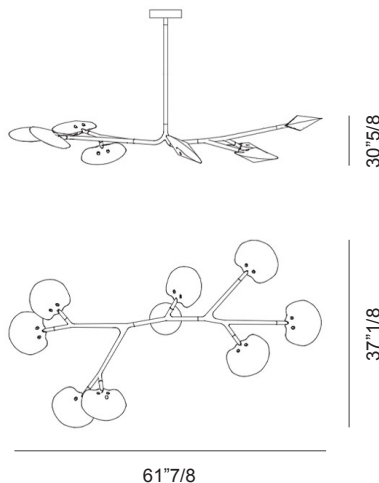


16.8a2 (8 pendants)

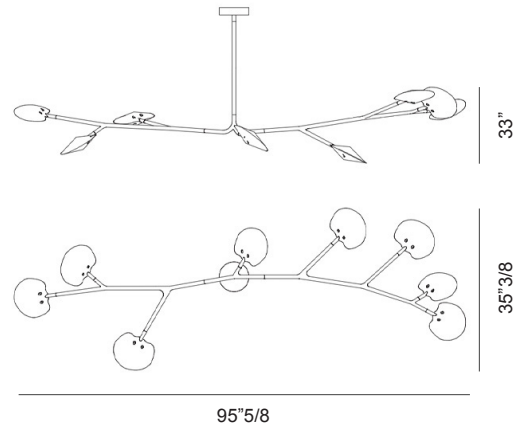


16.9a1 (9 pendants)

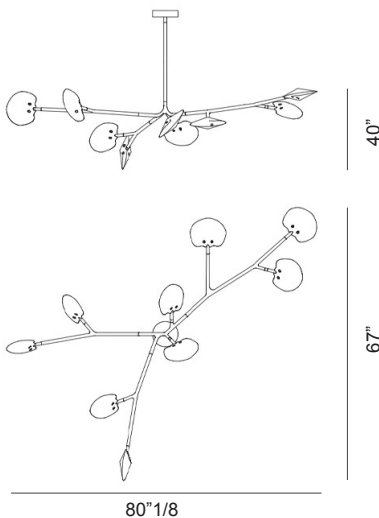

16.9a2 (9 pendants)

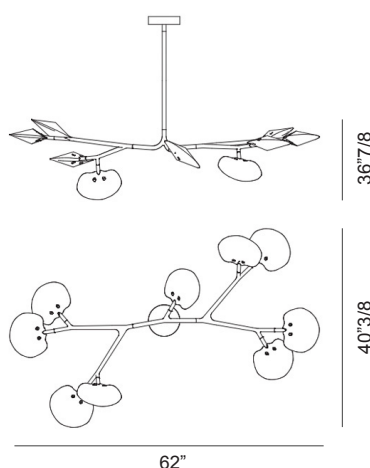


16.11a1 (11 pendants)

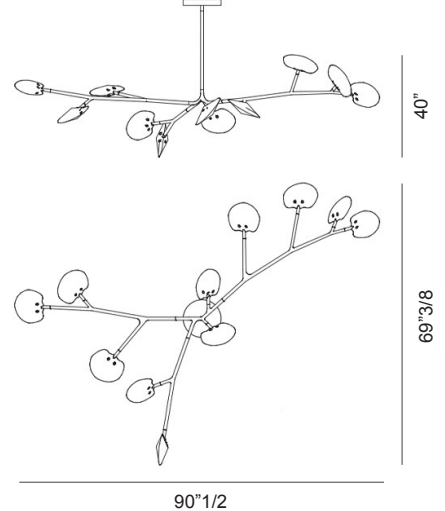


16 Armature


16.11a2 (11 pendants)

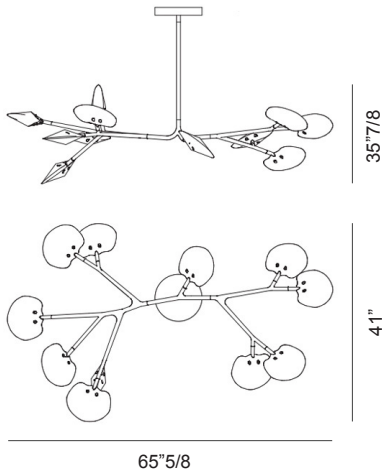


16.13a1 (13 pendants)

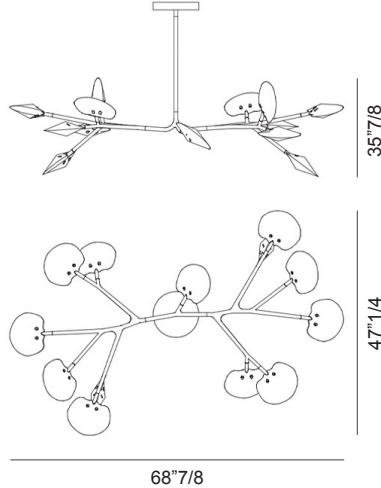

16.17a1 (17 pendants)

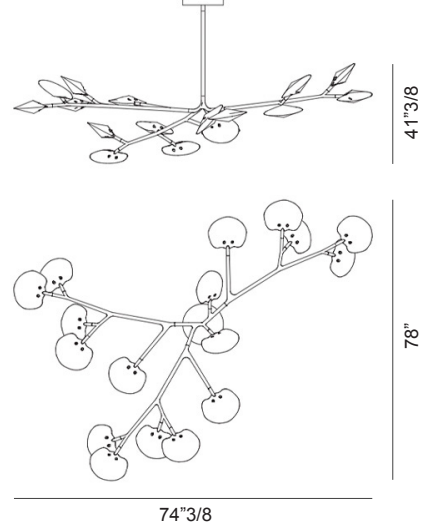

16.21a1 (21 pendants)

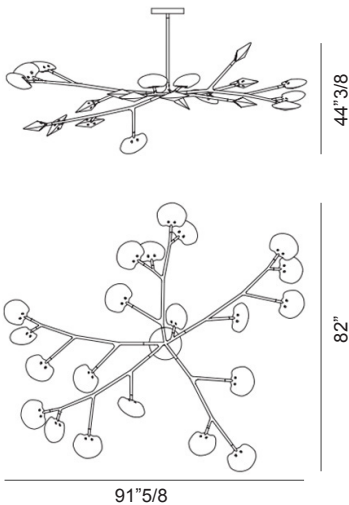

16.26a.1 (26 pendants)



Specifications

Mounting: Ceiling mounted.

Lamp: 1W LED, 2700K, 100lm.

Canopy Finish: Black powder coated.

Materials: Poured glass, black powder coated stainless steel armature, electrical components, matte black canopy.


Power Supply: Integral.

Bocci recommends remote mounting power supplies for ease of long-term maintenance.

Environment: Indoor, dry location. IP20.

16.5a - 16.9a


Canopy



Ø6"1/4

16.11a - 16.26a

Canopy



Ø9"7/8

