

# Kepler

*Design: Arihiro Miyake*



## *Description*

The Kepler collection is made of painted extruded aluminum, whose continuous line is obtained through a three-dimensional manufacturing process developed by Nemo. Designed on the basis of the mathematical principle of the Möbius strip. Diffuser in opaque technopolymer. Made in Italy.



## Kepler

### Dimensions




A: Ø43"1/4 x 15" - 15"3/4H

B: Ø33" x 12"5/8 - 13"3/4H

C: Ø19"5/8 x 7"1/2 - 8"5/8H




**A** Standard

Ø43"1/4

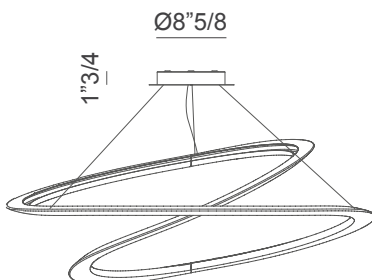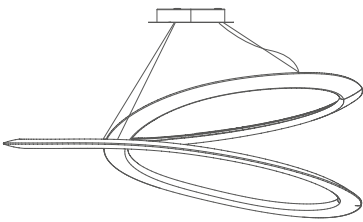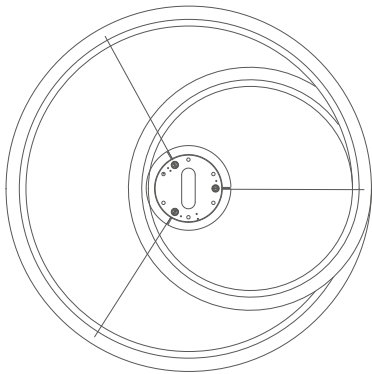




**B** Minor

Ø33"



**C** Petite

Ø19"5/8



## Kepler

---

### *Technical info.*

#### A Standard



<b>Versions</b>	Downlight & Uplight
<b>Source</b>	Linear LED
<b>Total power</b>	70W
<b>Emission</b>	Diffused
<b>Switching</b>	Dimmable
<b>Tension</b>	120V
<b>Color temperature</b>	2700K or 3000K
<b>Luminous flux</b>	4000lm
<b>Typ CRI</b>	85
<b>IP class</b>	20
<b>Materials</b>	Aluminum + PC
<b>Notes</b>	Adjustable cable length Max. 98"3/8, extra cable on request. 3500K and 4000K available on request, integral driver dual capability TRIAC-ELV and 0-10V

#### B Minor



<b>Versions</b>	Downlight & Uplight
<b>Source</b>	Linear LED
<b>Total power</b>	60W
<b>Emission</b>	Diffused
<b>Switching</b>	Dimmable
<b>Tension</b>	120V
<b>Color temperature</b>	2700K or 3000K
<b>Luminous flux</b>	3500lm
<b>Typ CRI</b>	85
<b>IP class</b>	20
<b>Materials</b>	Aluminum + PC
<b>Notes</b>	Adjustable cable length Max. 98"3/8, extra cable on request. 3500K and 4000K available on request, integral driver dual capability TRIAC-ELV and 0-10V

#### C Petite



<b>Version</b>	Downlight
<b>Source</b>	Linear LED
<b>Total power</b>	55W
<b>Emission</b>	Diffused
<b>Switching</b>	Dimmable
<b>Tension</b>	120V
<b>Color temperature</b>	2700K or 3000K
<b>Luminous flux</b>	1954lm
<b>Typ CRI</b>	85
<b>IP class</b>	20
<b>Materials</b>	Aluminum + PC
<b>Notes</b>	Adjustable cable length Max. 98"3/8, extra cable on request. 3500K and 4000K available on request, integral driver dual capability TRIAC-ELV and 0-10V

## Kepler

---

### *Technical info.*

#### A Standard



<b>Versions</b>	Downlight & Uplight
<b>Source</b>	Linear LED
<b>Total power</b>	70W
<b>Emission</b>	Diffused
<b>Switching</b>	Dimmable
<b>Tension</b>	120V
<b>Color temperature</b>	2700K or 3000K
<b>Luminous flux</b>	4000lm
<b>Typ CRI</b>	85
<b>IP class</b>	20
<b>Materials</b>	Aluminum + PC
<b>Notes</b>	Adjustable cable length Max. 98"3/8, extra cable on request. 3500K and 4000K available on request, integral driver dual capability TRIAC-ELV and 0-10V

#### B Minor



<b>Versions</b>	Downlight & Uplight
<b>Source</b>	Linear LED
<b>Total power</b>	60W
<b>Emission</b>	Diffused
<b>Switching</b>	Dimmable
<b>Tension</b>	120V
<b>Color temperature</b>	2700K or 3000K
<b>Luminous flux</b>	3500lm
<b>Typ CRI</b>	85
<b>IP class</b>	20
<b>Materials</b>	Aluminum + PC
<b>Notes</b>	Adjustable cable length Max. 98"3/8, extra cable on request. 3500K and 4000K available on request, integral driver dual capability TRIAC-ELV and 0-10V

#### C Petite



<b>Version</b>	Downlight
<b>Source</b>	Linear LED
<b>Total power</b>	55W
<b>Emission</b>	Diffused
<b>Switching</b>	Dimmable
<b>Tension</b>	120V
<b>Color temperature</b>	2700K or 3000K
<b>Luminous flux</b>	1954lm
<b>Typ CRI</b>	85
<b>IP class</b>	20
<b>Materials</b>	Aluminum + PC
<b>Notes</b>	Adjustable cable length Max. 98"3/8, extra cable on request. 3500K and 4000K available on request, integral driver dual capability TRIAC-ELV and 0-10V