

BOZU

Design: SIGNOROTTO + PARTNERS



Description

The Bozu suspension lamp is a luxury Italian lighting piece that perfectly balances refined design with innovative functionality. Its galvanized and matt black painted metal frame expresses strength and sophistication, while the opaline white Murano triplex glass diffuser adds a touch of timeless elegance, ensuring soft and harmonious light diffusion.

Finishes & Materials

Structure: Metal.

Diffuser: Murano glass.


Hanging strip: Leather.

Bozu

Dimensions

Single Lamp: Ø5"1/2 x 10"1/4H
Comp. A: 63"W x 5"1/2D x 10"1/4H
Comp. B: 66"1/8W x 28"3/8D x 10"1/4H
Comp. C: 47"1/4W x 28"3/8D x 10"1/4H
Comp. D: Ø15"3/4 x 63"H
Comp. E: Ø23"5/8 x 63"H
Comp. F: Ø31"1/2 x 63"H

Single Lamp

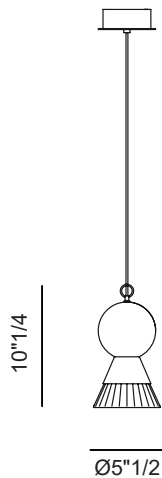


TECHNICAL DATA BÖZU S1

UP 4,7 W CRI>90
 3000 K – 725 NOMINAL LM
DOWN 4,7 W CRI>90
 3000 K – 725 NOMINAL LM

UP 4,7 W CRI>90
 2700 K – 672 NOMINAL LM
DOWN 4,7 W CRI>90
 2700 K – 672 NOMINAL LM

DIMMABLE TRIAC

Comp. A

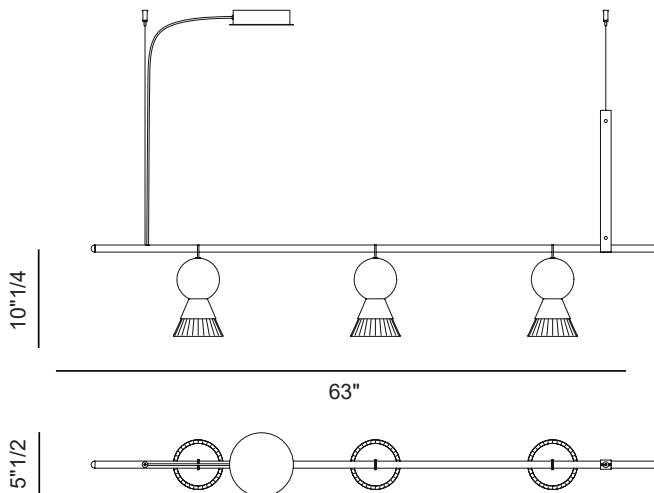

TECHNICAL DATA BÖZU S3 LN


UP 18 W CRI>90
 3000 K – 2175 NOMINAL LM
DOWN 18 W CRI>90
 3000 K – 2175 NOMINAL LM

UP 18 W CRI>90
 2700 K – 2016 NOMINAL LM
DOWN 18 W CRI>90
 2700 K – 2016 NOMINAL LM

DIMMABLE 0 - 10V

Bozu

Comp. B

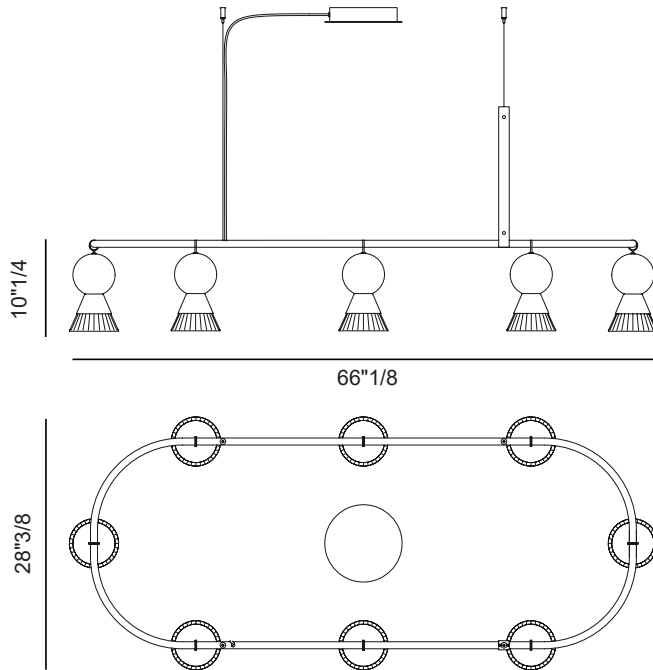


TECHNICAL DATA BÖZÜ S8 OV

UP 48 W CRI>90
3000 K – 5800 NOMINAL LM
DOWN 48 W CRI>90
3000 K – 5800 NOMINAL LM

UP 48 W CRI>90
2700 K – 5376 NOMINAL LM
DOWN 48 W CRI>90
2700 K – 5376 NOMINAL LM

DIMMABLE 0 - 10V

Comp. C

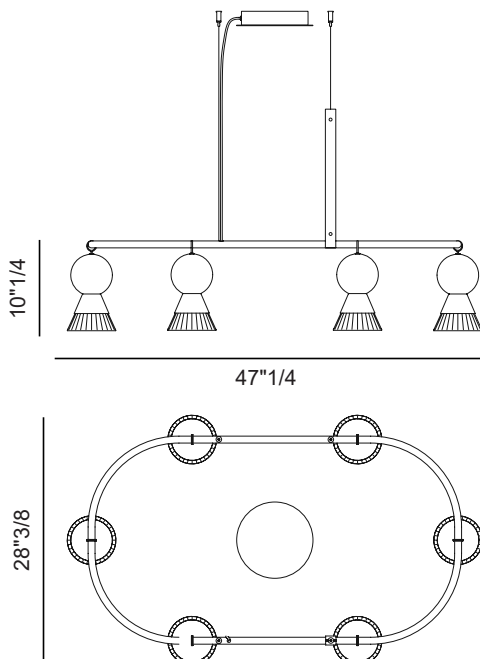

TECHNICAL DATA BÖZÜ S6 OV



UP 36 W CRI>90
3000 K – 4350 NOMINAL LM
DOWN 36 W CRI>90
3000 K – 4350 NOMINAL LM

UP 36 W CRI>90
2700 K – 4032 NOMINAL LM
DOWN 36 W CRI>90
2700 K – 4032 NOMINAL LM

DIMMABLE 0 - 10V

Bozu

Comp. D

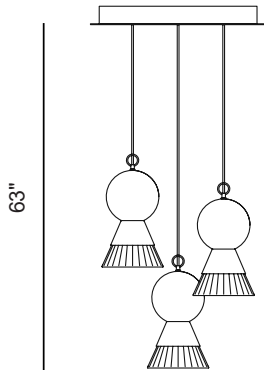

Ø15"3/4



TECHNICAL DATA BÖZÜ C3 RD 40

UP 18 W CRI>90
3000 K – 2175 NOMINAL LM
DOWN 18 W CRI>90
3000 K – 2175 NOMINAL LM

UP 18 W CRI>90
2700 K – 2016 NOMINAL LM
DOWN 18 W CRI>90
2700 K – 2016 NOMINAL LM

DIMMABLE 0 - 10V

Comp. E

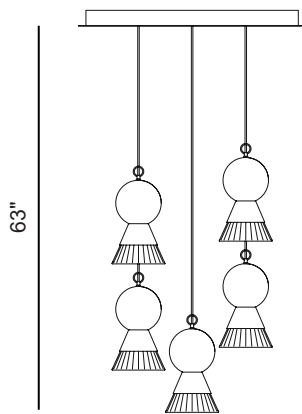

Ø23"5/8

TECHNICAL DATA BÖZÜ C5 RD 60


UP 30 W CRI>90
3000 K – 3625 NOMINAL LM
DOWN 30 W CRI>90
3000 K – 3625 NOMINAL LM

UP 30 W CRI>90
2700 K – 3360 NOMINAL LM
DOWN 30 W CRI>90
2700 K – 3360 NOMINAL LM

DIMMABLE 0 - 10V

Bozu

Comp. F

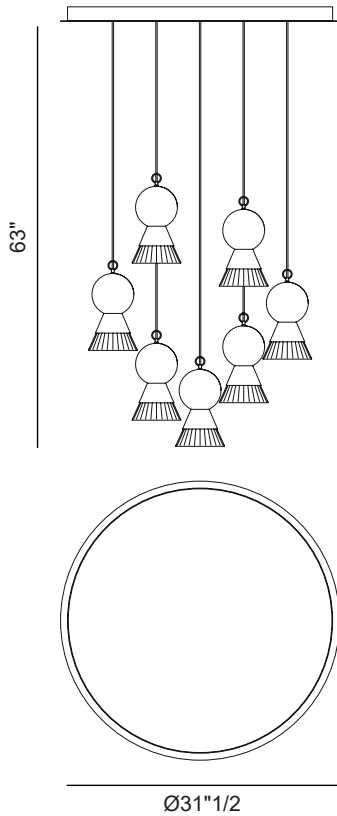

TECHNICAL DATA BÖZÜ C7 RD 80

UP 42 W CRI>90
3000 K – 5075 NOMINAL LM
DOWN 42 W CRI>90
3000 K – 5075 NOMINAL LM

UP 42 W CRI>90
2700 K – 4704 NOMINAL LM
DOWN 42 W CRI>90
2700 K – 4704 NOMINAL LM

DIMMABLE 0 - 10V