

## ANBT 02

*Design: Bruna Rapisarda*



### *Description*

The ANBT 02 rectangular bathtub by Norah Design is a masterclass in geometric precision and sensory contrast. Designed for the modern architectural bathroom, this freestanding piece utilizes the brand's proprietary Norahcryn solid surface to create a sanctuary of comfort and style. The design is characterized by its dual-finish aesthetic, offering a harmonious balance between the pure, technical interior and a customizable, vibrant exterior.

### *Finishes & Materials*







**Structure:** Acrylic.

**Cover drain:** Acrylic.


ANBT 02

## Dimensions

68"7/8W x 32"1/4D x 20"7/8H

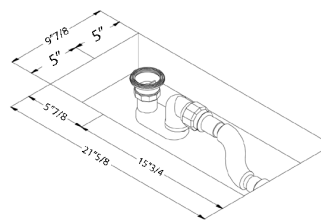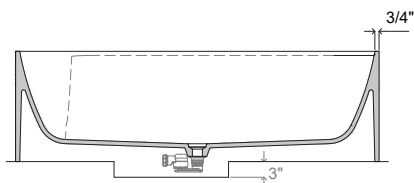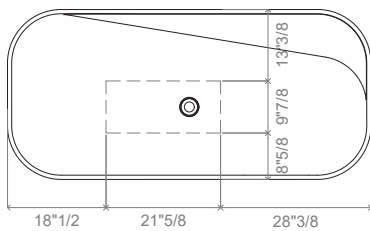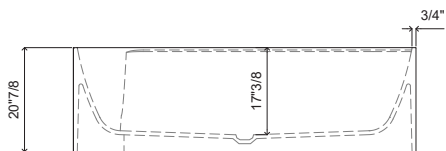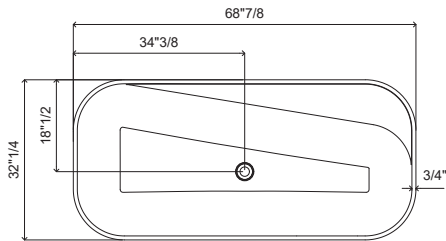


Dimension for siphon installation



Siphon and cover

Reference dimensions. You'll receive the installation instructions along with your order. For more information or if you have any questions, please contact us.

A 1000

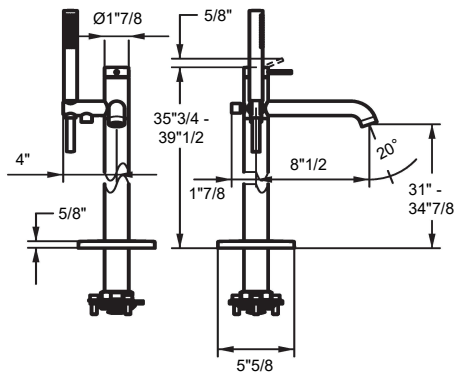


- \* Lever mixer
- \* For freestanding tub
- \* Integrated check valve in the hose outlet
- \* with shower holder
- \* Fixed spout
- Neoperl® SLIM®
- \* KWC cartridge M 35 OP
- with ceramic discs

- flow rate and temperature continuously variable
- temperature limitation
- \* Scope of delivery:
- Hand shower KWC FIT-X slim style 26.000.103.000
- Shower hose 1500 mm made of metal Z.538.415.000
- \* To be ordered separately:
- Unit for concealed installation 39.000.602.931

#### Technical Data

A_Spout_Spray	22 l/min (3 bar)
A_Shower outlet	11.5 l/min (3 bar)
Spout	fixe
Shower_set	MIT_BRAUSE_SCHLAUCH
Handling	top lever
Color_code	chromeline
Installation_type	Freestanding
Faucet_type	Lever mixer
Measure_Height	908-1004
G_Acoustic group	II
G_Acoustic group Shower outlet	I
Projection_A	A 215
Energy Label (CH)	C
Dimension Water outlet	790-886
material	Brass

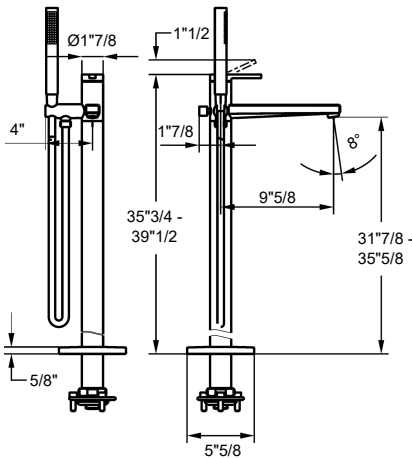

- \* Lever mixer
- \* For freestanding tub
- \* Made of stainless steel
- \* Integrated check valve in the hose outlet
- \* with shower holder
- \* Fixed spout
- Neoperl® SLIM®
- \* KWC cartridge M 35 OP

- with ceramic discs
- flow rate and temperature continuously variable
- temperature limitation
- \* Scope of delivery:
- Hand shower KWC FIT-X slim style 26.000.103.177
- Shower hose 1500 mm made of plastic 26.001.033.177
- \* To be ordered separately:
- Unit for concealed installation 39.000.602.931

#### Technical Data

A_Spout_Spray	22 l/min (3 bar)
A_Shower outlet	11.5 l/min (3 bar)
Spout	fixe
Shower_set	
Handling	top lever
Color_code	stainless steel
Installation_type	Freestanding
Faucet_type	Lever mixer
Measure_Height	927-1024
G_Acoustic group	II
G_Acoustic group Shower outlet	I
Projection_A	A 245
Energy Label (CH)	C
Dimension Water outlet	806-902
material	stainless steel