

## ISBT 01

*Design: Danilo Fedeli*



### *Description*

The ISBT 01 round freestanding bathtub by Norah Design is a masterwork of geometric purity, designed to transform the bathroom into a sanctuary of contemporary elegance. Its circular silhouette offers a 360-degree aesthetic appeal, making it an ideal centerpiece for spacious, high-end wellness environments.

### *Finishes & Materials*

**Structure:** Crystal.

**Cover drain:** Acrylic.


**Fittings:** Stainless steel.

ISBT 01

---


## Dimensions

Ø51"1/8 x 23"1/4H

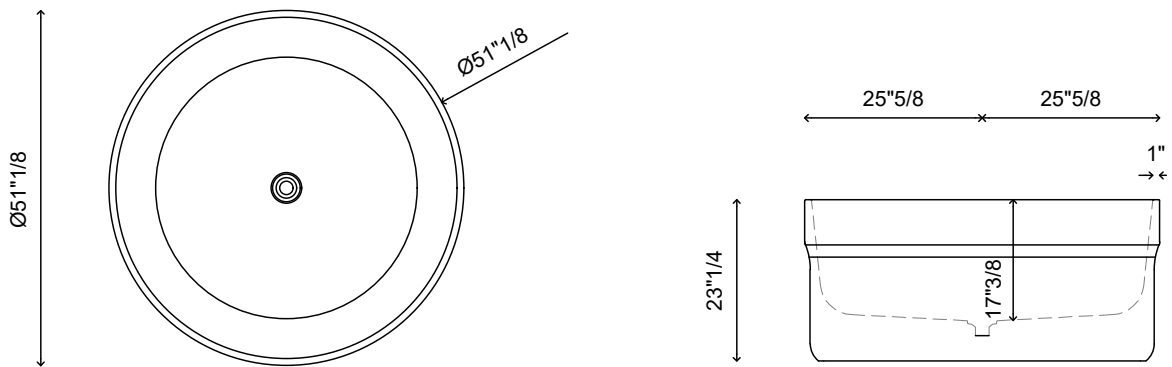

Reference dimensions. You'll receive the installation instructions along with your order. For more information or if you have any questions, please contact us.

## ISBT 01

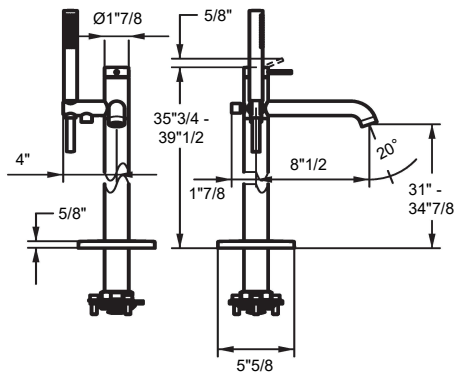

- \* Lever mixer
- \* For freestanding tub
- \* Integrated check valve in the hose outlet
- \* with shower holder
- \* Fixed spout
- Neoperl® SLIM®
- \* KWC cartridge M 35 OP
- with ceramic discs

- flow rate and temperature continuously variable
- temperature limitation
- \* Scope of delivery:
- Hand shower KWC FIT-X slim style 26.000.103.000
- Shower hose 1500 mm made of metal Z.538.415.000
- \* To be ordered separately:
- Unit for concealed installation 39.000.602.931

### Technical Data

A\_Spout\_Spray

22 l/min (3 bar)

A\_Shower outlet

11.5 l/min (3 bar)

Spout

fixe

Shower\_set

MIT\_BRAUSE\_SCHLAUCH

Handling

top lever

Color\_code

chromeline

Installation\_type

Freestanding

Faucet\_type

Lever mixer

Measure\_Height

908-1004

G\_Acoustic group

II

G\_Acoustic group\_Shower outlet

I

Projection\_A

A 215

Energy Label (CH)


C

Dimension Water outlet

790-886

material

Brass

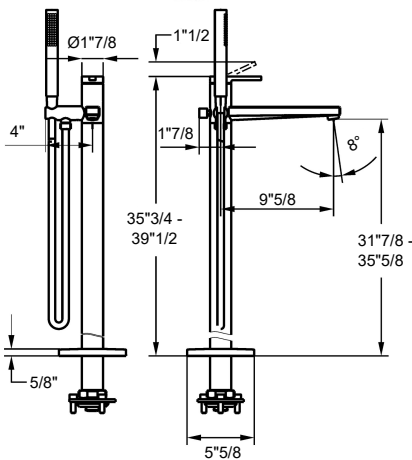

- \* Lever mixer
- \* For freestanding tub
- \* Made of stainless steel
- \* Integrated check valve in the hose outlet
- \* with shower holder
- \* Fixed spout
- Neoperl® SLIM®
- \* KWC cartridge M 35 OP

- with ceramic discs
- flow rate and temperature continuously variable
- temperature limitation
- \* Scope of delivery:
- Hand shower KWC FIT-X slim style 26.000.103.177
- Shower hose 1500 mm made of plastic 26.001.033.177
- \* To be ordered separately:
- Unit for concealed installation 39.000.602.931

### Technical Data

A\_Spout\_Spray

22 l/min (3 bar)

A\_Shower outlet

11.5 l/min (3 bar)

Spout

fixe

Shower\_set

fixe

Handling

top lever

Color\_code

stainless steel

Installation\_type

Freestanding

Faucet\_type

Lever mixer

Measure\_Height

927-1024

G\_Acoustic group

II

G\_Acoustic group\_Shower outlet

I

Projection\_A

A 245

Energy Label (CH)

C

Dimension Water outlet

806-902

material

stainless steel